

MMT310 Series Moisture and Temperature Transmitters for Oil



Two probe options: MMT318 and MMT317. Optional rain shield is also available.

Features/Benefits

- Continuous measurement of moisture in oil
- Proven Vaisala HUMICAP® sensor, over 15 years in oil applications
- Measurements in lubrication, hydraulic and transformer oils
- Excellent pressure and temperature tolerance
- Measuring water activity - ppm calculation for transformer oil
- Small size, easy to integrate
- NIST traceable calibration (certificate included)
- Applications: e.g. monitoring of transformer oil and of lubrication systems in marine and paper industry

The Vaisala HUMICAP® Moisture and Temperature Transmitter Series for Oil MMT310 is a fast and reliable on-line detector for moisture in oil.

Reliable Vaisala HUMICAP® Technology

The MMT310 series incorporates the latest generation of the Vaisala HUMICAP® sensor, developed for demanding moisture measurement in liquid hydrocarbons. The sensor's excellent chemical tolerance provides accurate and reliable measurement over the wide measurement range.

Measuring Water Activity

The MMT310 measures moisture in oil in terms of the water activity (a_w) and temperature (T). Water activity indicates directly whether there is a risk of free-water formation. The measurement is independent of oil type, age, and temperature.

Water Content as PPM Calculation for Transformer Oils

PPM units are traditionally used in transformer applications. They indicate the average mass concentration of water in oil. The ppm calculation for mineral oil based transformer oil is optional in the MMT310 series.

Diverse Applications and Demanding Conditions

The MMT310 can be used in lubrication and hydraulic systems as well as in transformers. It can be used for on-line moisture monitoring and as a control function, allowing separators and oil purifiers to be started only when necessary.

Installation Options

The MMT318 has two adjustable probe lengths. The transmitter can be ordered with a ball-valve set that enables the insertion and removal of the moisture probe for calibration, without the need to empty the oil system.

The MMT317 has a small pressure-tight probe with optional Swagelok fittings.

An optional rain shield is available for outdoor installations.

Several Outputs, One Connector

The MMT310 series has two analog outputs and an RS232 serial output. The output signals and the supply power travel in the same cable, the only cable connected to the unit.

Technical Data

Measured Values

WATER ACTIVITY

Measurement range a_w	0 ... 1
Accuracy (including non-linearity, hysteresis, and repeatability)	
0 ... 0.9	±0.02
0.9 ... 1.0	±0.03
Response time (90 %) at +20 °C in still oil (with stainless steel filter)	10 min.

Sensor Vaisala HUMICAP® 180L2

TEMPERATURE

Measurement range	-40 ... +180 °C (-40 ... +356 °F)
Typical accuracy at +20 °C (68 °F)	±0.2 °C (±0.36 °F)
Sensor	Pt100 RTD Class F0.1 IEC 60751

Electrical Connections

Two analog outputs, selectable and scalable	0 ... 20 mA or 4 ... 20 mA 0 ... 5 V or 0 ... 10 V 1 ... 5 V available through scaling
Typical accuracy of analog output at +20 °C	±0.05 % full scale
Typical temperature dependence of analog output	0.005 %/°C (0.003 %/°F)
Serial output	full scale RS232C
Connections	8-pole connector with RS232C, current/voltage outputs (two channels) and U_{in}
Operating voltage	10 ... 35 VDC
Minimum operating voltage	
RS232C output	10 VDC
Analog output	15 VDC
Pressures above 10 bara (145 psia)	24 VDC
Power consumption	
RS232C	12 mA
U_{out} 10 V (10 kOhm)	12 mA
channel 1 & channel 2	
I_{out} 20 mA (load 511 Ohm)	50 mA
channel 1 & channel 2	
External load	$R_L < 500$ Ohm
Startup time after power-up	3 s

Accessories


Rain shield	ASM211103
USB cable	238607
Stainless steel filter	HM47453SP
Stainless steel filter (high flow rate)	220752SP

General

Operating temperature range for electronics	-40 ... +60 °C (-40 ... +140 °F)
Storage temperature	-55 ... +80 °C (-67 ... +176 °F)
Pressure range for MMT318 with ball-valve up to 120 °C	0 ... 40 bar
Pressure range for MMT317	0 ... 10 bar
Material	
transmitter housing	G-AISI 10 Mg
transmitter base	PPS
Housing classification	IP66
Cable feed through alternatives	8-pole connector with 5 m cable, female 8-pin connector screw joint for cable diameter 4 ... 8 mm
Sensor protection	stainless steel grid standard filter stainless steel grid filter for high flow rates (>1 m/s)
Probe cable length	
MMT317	2 m, 5 m, or 10 m
MMT318	2 m, 5 m, or 10 m
Weight (depending on selected probe and cable)	
example: MMT317 with 2 m cable	476 g
Probe installation MMT317	
Swagelok®	NPT 1/2", ISO 3/8" or ISO 1/2"
Probe installation MMT318	
Fitting bodies	ISO 1/2", NPT 1/2"
Ball-Valve Set	BALLVALVE-1
Complies with EMC standard EN61326-1, Industrial environment	

Dimensions

Dimensions in mm (inches)

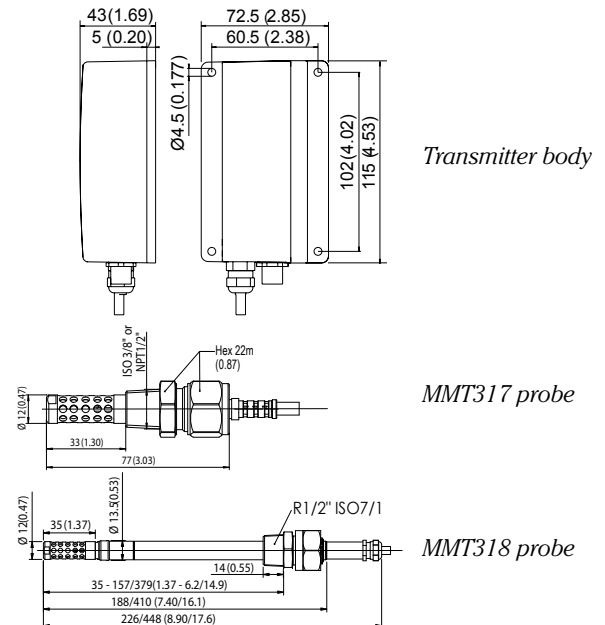

VAISALA

Vaisala takes pride in professional and comprehensive specifications that are based on scientific test methods and known standards. The accuracy specification takes into account repeatability, non-linearity, and hysteresis, and is given for the full measurement range, unless otherwise stated. This means our customers get truly reliable information with no gaps, helping them make the right decisions.



Scan the code for more information

Ref. B210831EN-E ©Vaisala 2015

This material is subject to copyright protection, with all copyrights retained by Vaisala and its individual partners. All rights reserved. Any logos and/or product names are trademarks of Vaisala or its individual partners. The reproduction, transfer, distribution or storage of information contained in this brochure in any form without the prior written consent of Vaisala is strictly prohibited. All specifications — technical included — are subject to change without notice.

www.vaisala.com/requestinfo